



W.D. Turner Company, Inc.

Sales & Technical Services

#7 Whitaker Place
Thomasville, North Carolina 27360

Phone: (336) 882-4931

Fax: (336) 882-5175

www.WDturner.com

NOTICE

This Manual or Spec Sheet was provided through our web site to assist Customers who purchased equipment through W. D. Turner Company, Inc.

Please do not operate, repair or modify equipment without proper training. Our company provides on-site calibrations, repairs and training. Please contact our office for free quotes or more information.

Please use this Manual or Spec Sheet at your own risk. We welcome inquires about this equipment. Telephone and email technical support is provided free for our customers.

You are invited to visit our web site at:

www.wdturner.com

Thank you for considering our products and services!

LLOYD INSTRUMENTS™

LR10K *Plus* Series

10 kN Materials Testing Machine

The LR10K *Plus* series advanced, twin column, materials testing machine incorporates an extensive range of features making it ideal for performing complex testing applications up to 10 kN (2200 lbf) at a highly affordable price.

The machine is microprocessor controlled and incorporates world proven 32 bit technology for highly accurate load measurement and rapid data acquisition. The integral user interface consists of a side mounted control console with large, positive action membrane switches, allowing complex tests to be performed at the touch of a button. A large, back lit Liquid Crystal Display shows the test and set-up information in an extensive choice of user selectable languages and units. The stand alone system is capable of storing up to 600 test results from a choice of ten programmable test setups, or may be connected via its RS232 output to a personal computer running NEXYGEN™ software, providing almost unlimited testing and results processing capability.

The high stiffness frame incorporates a crosshead guidance system to prevent side loading of the sample under test. The crosshead is driven by twin lead screws and a high precision servo motor and DC servo system to achieve a wide range of speeds throughout the full load range. A range of highly accurate, interchangeable loadcells are available for tension, compression and cycling through zero force measurements. An extensive range of grips and fixtures are also available to support virtually any type of test.

The LR10K can be further complemented with Lloyd Instruments state of the art materials test and data analysis software NEXYGEN™ thanks to a built in RS232 interface, allowing full PC integration. The system is ideal for use in production, quality control, educational and research environments.

Features

- Simple to set up, operate and maintain
- 2 key press operation
- High accuracy load measurement
- Data sampling rate 1000Hz
- 32 bit micro controller
- Saves 600 test results
- 10 programmable test set-ups
- Exceeds national and international standards
- Large crosshead travel (975 mm/38 in) for ductile samples
- Multi-lingual, Multi-unit, 4 line, back-lit display
- Full PC integration with NEXYGEN™ software
- Wide selection of load cells, grips, jigs and accessories
- Flash up gradeable

Specifications

Force Range:	10 kN (2200 lbf)
Crosshead Speed:	0.01 to 510 mm/min 0.0005 to 20 in/min
Speed Accuracy:	Better than 0.2% at steady state
Crosshead Travel:	975mm, 38 in
Travel (Extended Frame):	1475 mm, 58 in
Load Resolution:	< 0.005% of load cell used (max)
Extension Resolution:	Better than 0.001 mm - 0.04 thou
Data Sampling Rate:	1000 Hz
Extensometer Inputs:	+10V dc analogue input Strain gauge input optional
Data Outputs:	Digital - RS232 Analogue - 10Vdc max
Measuring System:	Exceeds the requirements of BS EN ISO

	7500-1, ASTM E4, DIN 51221.
Analysis Software:	NEXYGEN™ Data Analysis Software (optional)
Supply Voltage:	115/230Vac ± 10% 50 - 60Hz
Weight:	105Kg (231lb)
Operating Temp:	5°C to 35°C (40°F to 95°F)
Warranty:	1 year



SPECIFICATION
SS-MT-6211-0401
April 2001

www.ametek.com
www.chatillon.com
www.lloyd-instruments.co.uk

AMETEK and CHATILLON are registered trademarks of AMETEK, Inc.
LLOYD INSTRUMENTS, NEXYGEN and ONDIO are trademarks of AMETEK, Inc.

Copyright 2001, by AMETEK, Inc.


LLOYD
INSTRUMENTS™
A trademark of AMETEK Inc.

Ordering Information

Model	Part No.	Description
LR10K <i>Plus</i>	01/3076	LR10K <i>Plus</i> without console
LR10K <i>Plus</i>	01/3052	LR10K <i>Plus</i> with console
LR10K <i>Plus</i>	01/3077	LR10K <i>Plus</i> Extended column without console
LR10K <i>Plus</i>	01/3078	LR10K <i>Plus</i> Extended column with console
LR10K <i>Plus</i>	01/3079	LR10K <i>Plus</i> Pogo design without console
LR10K <i>Plus</i>	01/3080	LR10K <i>Plus</i> Pogo design with console

Product Dimensions

	mm	in
A	1555	61
B	404	16
C	638	25
D	845	33
E	230	9.0
F	480	19

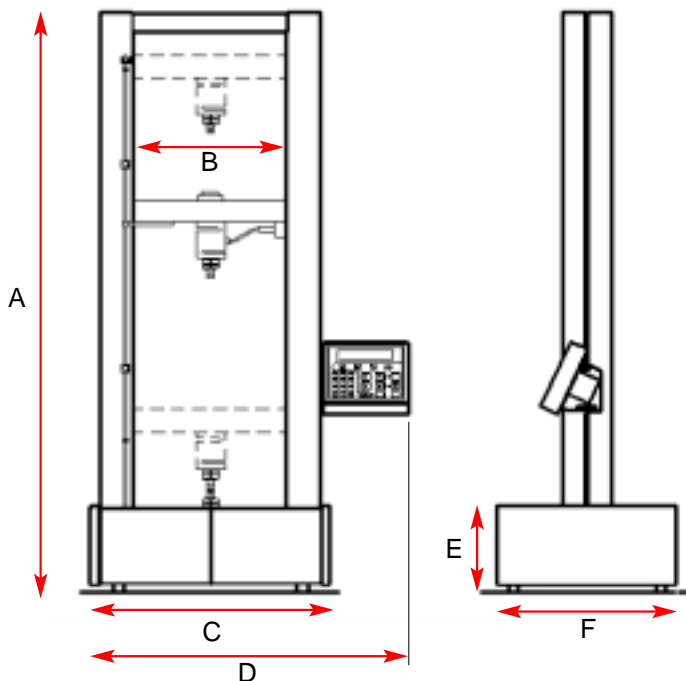

Standard Accessories

LOADCELLS:

5 N (1 lbf)
 10 N (2 lbf)
 20 N (4 lbf)
 50 N (11 lbf)
 100 N (22 lbf)
 250 N (55 lbf)
 500 N (110 lbf)
 1000 N (220 lbf)
 2500 N (550 lbf)
 5000 N (1100 lbf)
 10 kN (2200lbf)

ITEM

XLC-0005-A1 01/2946
 XLC-0010-A1 01/2360
 XLC-0020-A1 01/2950
 XLC-0050-A1 01/2361
 XLC-0100-A1 01/2480
 XLC-0250-A1 01/3048
 XLC-0500-A1 01/2362
 XLC-1000-A1 01/2419
 XLC-2500-A1 01/2363
 XLC-5000-A1 01/2364
 XLC-10K-A1 01/2365

MODEL

EXTENSOMETERS:

Non Contacting Extensometer (115V) with stand
 Non Contacting Extensometer (230V) with stand
 Extensometer Punch (applies 2 mm, 0.08 in) targets
 Extensometer Punch (applies 4 mm, 0.16 in) targets
 Longtravel Extensometer without stand
 Extensometer Stand for EXL750
 High Res' Longtravel Extensometer with stand

LASERSCAN E1 01/2939
 LASERSCAN EZ 01/2913
 TTOXP/2 01/1159
 TTOXP/4 01/1156
 EXL750 EZ 01/2914
 EXT STAND B 01/2313
 EXH750/EZ 01/2915

High Res' Strain Gauge Extensometers:

Gauge Length 10mm (0.40 in) max elongation 10% STGA/10/10E 01/2917
 Gauge Length 10mm (0.40 in) max elongation 50% STGA/10/50E 01/2959
 Gauge Length 20mm (0.80 in) max elongation 100% STGA/20/100E 01/2976
 Gauge Length 25mm (0.98 in) max elongation 5% STGA/25/5E 01/2955
 Gauge Length 25mm (0.98 in) max elongation 10% STGA/25/10E 01/2918
 Gauge Length 25mm (0.98 in) max elongation 25% STGA/25/25E 01/2919
 Gauge Length 25mm (0.98 in) max elongation 50% STGA/25/50E 01/2920
 Gauge Length 25mm (0.98 in) max elongation 100% STGA/25/100E 01/2921
 Gauge Length 50mm (1.97 in) max elongation 5% STGA/50/5E 01/2957
 Gauge Length 50mm (1.97 in) max elongation 25% STGA/50/25E 01/2922
 Gauge Length 50mm (1.97 in) max elongation 50% STGA/50/50E 01/2923
 Gauge Length 50mm (1.97 in) max elongation 100% STGA/50/100E 01/2924
 Gauge Length 80mm (3.15 in) max elongation 10% STGA/80/10E 01/2925
 Gauge Length 80mm (3.15 in) max elongation 25% STGA/80/25E 01/2926

SOFTWARE:

NEXYGEN™ 4.0 Software Package 40/0658
 NEXYGEN™ Upgrade to Version 4.0 40/0658/NR
 ONDIO Application Builder (Use With NEXYGEN) 40/0683
 NEXYGEN/ONDIO Software Suite 40/0695
 NEXYGEN/ONDIO Upgrade 40/0695/U

GRIPS & FIXTURES:

W. D. Turner Company, Inc.
 7 Whitaker Place, Thomasville, NC 27360
 Phone: 336-882-4931 Fax 336-882-5175
 (Sales & Service) www.WDTurner.com

AMETEK
 TEST AND CALIBRATION INSTRUMENTS

WINDOWS, EXCEL, ACCESS AND POWERPOINT are registered trademarks of Microsoft Corporation

UK
 Lloyd Instruments Ltd
 Forum House
 12 Barnes Wallis Road
 Segensworth East, Fareham
 Hampshire, PO15 5TT
 UK
 Tel: +44 (0)1489 486 399
 Fax: +44 (0)1489 885 118

America
 AMETEK TCI Division
 8600 Somerset Drive
 Largo
 Florida 33773
 USA
 Tel: +1 (727) 536 7831
 Fax: +1(727) 539 6882

Far East
 Lloyd Instruments
 Far East Representative Office
 No7 Sherwood Place
 Alexander Heights
 6064 Perth
 WESTERN AUSTRALIA
 Tel: +61 8 9343 5725
 Fax: +61 8 9343 5723

France
 Lloyd Instruments SA
 3 avenue des Coudriers
 Zone d'activite de l'observatoire
 78180 Montigny-Le-Bretonneux
 FRANCE
 Tel: +33 (1) 30 57 47 74
 Fax: +33 (1) 30 57 50 33

Germany
 AMETEK Precision Instruments
 Europe GmbH
 Rudolf-Diesel-StraÙe 16
 D-40670 Meerbusch
 GERMANY
 Tel: +49 (0)2159 9136-70
 Fax: +49 (0)2159 9136-80

email: general@lloyd-instruments.co.uk
 www.lloyd-instruments.co.uk